

HST CHEMICAL METERING PUMPS

Product Description:

Henkel Corporation HST pumps are versatile, high quality, chemical metering pumps. Designed and manufactured by Henkel specifically for our chemical processes, the HST Pumps deliver accurate feed rates from less than 1 GPH up to 60 GPH. Henkel Corporation offers five models: HST-2, HST-5, HST-8, HST-25 and HST-60. All pumps are compatible with most Henkel Corporation Chemicals and are built to the high quality and reliability standards that are a trademark of Henkel Corporation.



Product Features

- Manual stroke adjustment for control of delivery rate.
 - Pulse (frequency) adjustment for fine control of delivery rate with HST 2.
 - Manual or automatic operation.
 - Dual check valve assemblies to ensure better priming, and consistent delivery.
 - Indicator lights; Power On, Stroke Indicator, Fault.
-

Product Benefits

- Automatic or manual chemical additions to process tank.
 - Long life, minimal maintenance.
 - Reduced operator chemical handling.
-

HST CHEMICAL METERING PUMPS

Technical Data


Model	IDH Part No.	Voltage	Delivery Rate	
	PSIG			
HST 2	2246816	120VAC/60 Hz	0 to 2 GPH	29
HST 5	2246808	120VAC/60 Hz	1 to 5 GPH	145
HST 8	2246805	120VAC/60 Hz	1 to 8 GPH	145
HST 25	2246813	120VAC/60 Hz	3 to 25 GPH	58
HST 60	Special Order	120VAC/60 Hz	3 to 60 GPH	87

*220 VAC pump versions available by special order.

Accessory items

- 2252168 – Tubing, ½” OD for liquid acid or alkaline products, 50 feet length.
- 2252169 – Tubing, 3/8” OD for liquid acid or alkaline products, 50 feet length.
- 2251334 - Foot Valve, ½” NPT for liquid acid or alkaline products.
- 2251333 - Foot Valve Universal Extension Kit for liquid acid, or alkaline products.

How to order

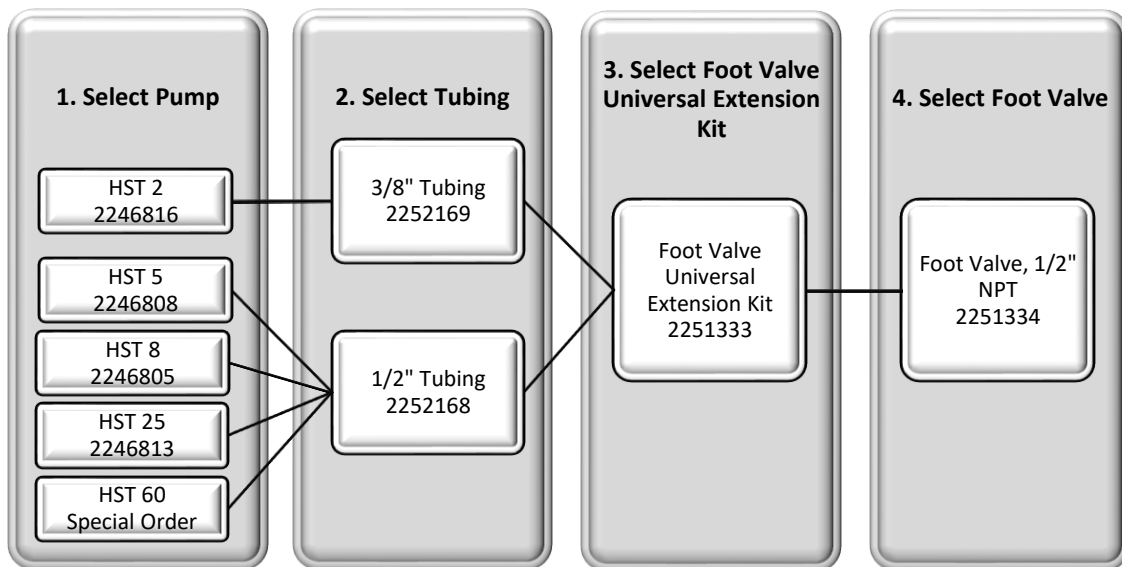

Note

The data contained herein are furnished for information only and are believed to be reliable. We cannot assume responsibility for the results obtained by others over whose methods we have no control. It is the user's responsibility to determine suitability for the user's purpose of any production methods mentioned herein and to adopt such precautions as may be advisable for the protection of property and of persons against any hazards that may be involved in the handling and use thereof. In light of the foregoing, Henkel Corporation specifically disclaims all warranties expressed or implied, including warranties of merchantability or fitness for a particular purpose, arising from sale or use of Henkel Corporation's products. Henkel Corporation specifically disclaims any liability for consequential or incidental damages of any kind, including lost profits. The discussion herein of various processes or compositions is not to be interpreted as representation that they are free from domination of patents owned by others or as a license under any Henkel Corporation patents that may cover such processes or compositions. We recommend that each prospective user test his proposed application before repetitive use, using this data as a guide. This product may be covered by one or more United States or foreign patents or patent applications.

Trademark usage

Except as otherwise noted, all trademarks in this document are trademarks of Henkel Corporation in the U.S. and elsewhere. ® denotes a trademark registered in the U.S. Patent and Trademark Office.

Document # 8906396, Date: 09/08/2017

Henkel Americas

Henkel Europe

Henkel Asia Pacific

BONDERITE[®]

1-800-LOCTITE
www.equipment.loctite.com

+49.89.320800.1800
www.henkel.com/industrial

+86.21.2891.8863
www.henkel.com/industrial