

TEROSON®

142241 Teroson® Multi-Press Telescopic Dispenser

Product Description Sheet



Product Description

The Teroson Multi-Press Dispenser is a hand held pneumatic dispenser designed for spray applications of sealants and adhesives packaged in 300 ml cartridges. The air spray distributes the adhesive uniformly on the surface being coated, expands the product coverage area, and reduces cycle time required to apply adhesive to large surfaces. The dispenser is capable of either spray, bead, or ribbon patterns to produce seam and joint seals as well as surface coatings.

Product Features

- The material flow and spray air can be regulated independently for fine control.
- Telescopic cylinder provides hermetic separation of the adhesive and air.
- Capable of dispensing both spray and bead patterns.
- Two stage discharge valve.
- Quick Disconnect Air Fitting

Product Benefits

- Piston is guided straight and true
- Continuous control
- No material drips
- No air bubbles
- Compact and rugged construction


Technical Data

- Input Pressure : 145psi max
- Internal Working Pressure : 0 to 100 psi
- Compressed Air : Free of dirt, dry, lightly oiled
- Compressed air connection : 1/4-19 BSPP
- Dimensions
 - Length: 15.3 in (389 mm)
 - Diameter: 2.8 in (70 mm)
 - Height: 9.5 in (242 mm)
- Weight: 2.2 lbs. (1 Kg)
- Environmental Temperature: 0° to 140° F

Note: It is recommended that the working pressure does not exceed 60 PSI when dispensing from plastic cartridges.

Parts Included

- A = Quick Disconnect Air Line Connector
- B = Tool for piercing aluminum cartridges
- SN = Blue nozzle cap for applying spray able seam sealant
- DK = Black nozzle cap for clamping 300ml cartridges for multifunctional use.

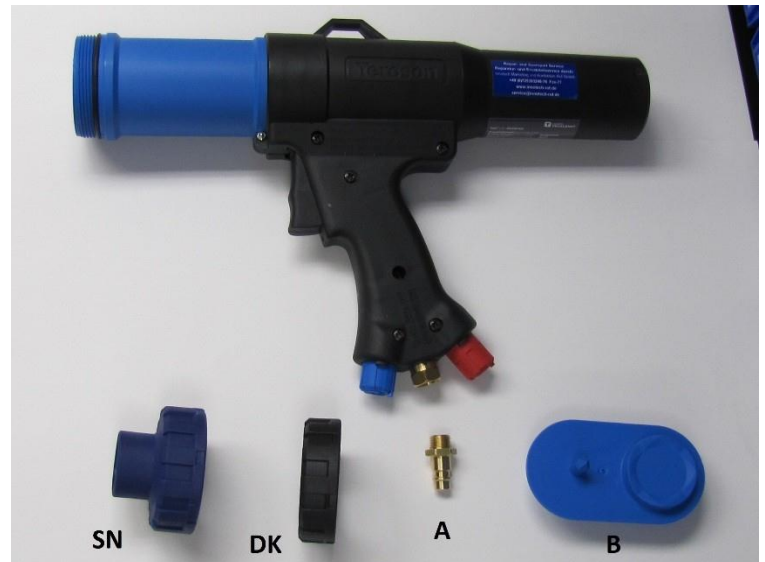

Required Nozzles (sold separately):

- Teroson Multi-Press Spray Nozzle 12 Pack - Item # 547882



Item # 547882

Optional Accessories (sold separately):

- Teroson Cartridge Opener - Item #395397
- 300 ML Cartridge Heater 65° C 110V – Item # 1271651



Item # 1271651

Note

The data contained herein are furnished for information only and are believed to be reliable. We cannot assume responsibility for the results obtained by others over whose methods we have no control. It is the user's responsibility to determine suitability for the user's purpose of any production methods mentioned herein and to adopt such precautions as may be advisable for the protection of property and of persons against any hazards that may be involved in the handling and use thereof. In light of the foregoing, Henkel Corporation specifically disclaims all warranties expressed or implied, including warranties of merchantability or fitness for a particular purpose, arising from sale or use of Henkel Corporation's products. Henkel Corporation specifically disclaims any liability for consequential or incidental damages of any kind, including lost profits. The discussion herein of various processes or compositions is not to be interpreted as representation that they are free from domination of patents owned by others or as a license under any Henkel Corporation patents that may cover such processes or compositions. We recommend that each prospective user test his proposed application before repetitive use, using this data as a guide. This product may be covered by one or more United States or foreign patents or patent applications.

Trademark usage

Except as otherwise noted, all trademarks in this document are trademarks of Henkel Corporation in the U.S. and elsewhere. © denotes a trademark registered in the U.S. Patent and Trademark Office.

Document # 8904465, Date: 09/23/2014

Henkel Americas

1-800-LOCTITE

www.equipment.loctite.com

Henkel Europe

+49.89.320800.1800

www.henkel.com/industrial

Henkel Asia Pacific

+86.21.2891.8863

www.henkel.com/industrial